


**ANTI SLIP TAPE
HAS930
TECHNICAL DATA**

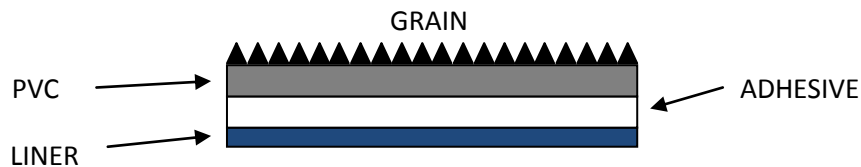

TECHNICAL DESCRIPTION	UNIT OF MEASUREMENT	TECHNICAL VALUE
CARRIER	MICRON	PVC FILM 100 MICRON
ADHESIVE		SOLVENT ACRYLIC
ANTI SLIP MATERIAL	GRIT	#60 GRIT ALUMINIUM OXIDE
OVERALL THICKNESS	mm	1.20(±0.2)
LINER		100gsm PAPER
COLOUR		BLACK/YELLOW HAZARD
ADHESION	GRAMS / 25mm	1500
TENSILE STRENGTH	GRAMS / 25mm ²	6000
ELONGATION AT BREAK		25%
TEMPERATURE RANGE	°C	-30 °C to +60 °C
RESISTANCE TO WATER		GOOD
U.V. RESISTANCE		GOOD

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.